


Levelling Castor Series HR, Wheel Z



max 450 kg -30 °C - +80 °C 75-125 mm

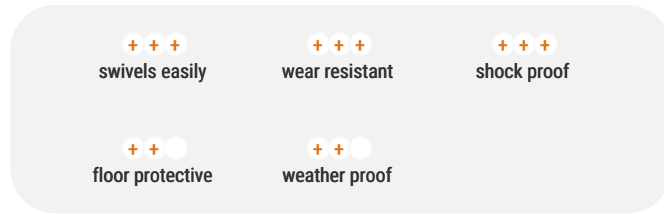

Material



Cast polyurethane coating, 95±3 Shore A

Steel wheel centre

Material Fork



Finish: reinforced pressed steel housing zinc plated, hardened double ball bearing, sealed, grease nipple, levelling foot reinforced black nylon with NBR-rubber pad

Advantages

- ✓ THE LEVELLING CASTOR WITH INTEGRATED, ADJUSTABLE MOUNT PROVIDES PERFECT STABILITY. In the position 'levelling', the housing is free of load and can be turned. The force necessary to service the leavers doesn't depend on the weight of the load.
- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ high chemical resistance

Applications

- Decoration carts
- Stage equipment

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
HR 75 ZK	Swivel castor	75x40	300	115-123	105x85	80x60	9	189		529,08
HR 80 ZK	Swivel castor	80x25	150	117-123	105x85	80x60	9	190		330,48
HR 125 ZK	Swivel castor	125x45	450	171-181	135x110	105x80	13	254		618,12