

Ball Units Series A5 S/6

 max 610 kg  -30 °C - +70 °C

Material

Ball: zinc-plated or stainless steel


Housing, zinc-plated or stainless steel

Advantages

- ✓ bearing shell made of specially hardened steel
- ✓ Several holes to let out dirt
- ✓ Sealing lip made of wool felt
- ✓ Reinforced coned outer ring for improved protection

Applications

- Haulage way
- Assembly lines

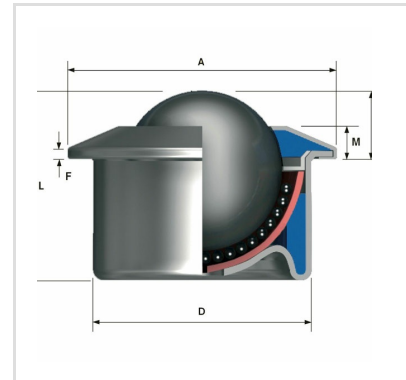

SERIES 6 - REINFORCED CONED OUTER RING FOR IMPROVED PROTECTION

Dimensions

ARTICLE NUMBER	ARTICLE TYPE	SERIES	BALL-Ø MM	FINISH HOUSING	FINISH BALLS	LOAD CAPACITY KG	A MM	B MM	D MM	F MM	G MM	H MM	M MM	L MM	PRICE €
A515-6-13	Ball Transfer Unit	6	15	steel zinc plated	carbon-steel	60	31	9,5	24	2,8	29	3,5	6	21	23,52
A515-6-15	Ball Transfer Unit	6	15	stainless steel	stainless steel	38	31	9,5	24	2,8	29	3,5	6	21	42,00
A515-6-16	Ball Transfer Unit	6	15	steel zinc plated	stainless steel	60	31	9,5	24	2,8	29	3,5	6	21	30,48
A522-6-13	Ball Transfer Unit	6	22	steel zinc plated	carbon-steel	160	45	9,8	36	2,8	-	-	6	30	27,24
A522-6-15	Ball Transfer Unit	6	22	stainless steel	stainless steel	100	45	9,8	36	2,8	-	-	6	30	52,68
A522-6-16	Ball Transfer Unit	6	22	steel zinc plated	stainless steel	160	45	9,8	36	2,8	-	-	6	30	35,88
A530-6-13	Ball Transfer Unit	6	30	steel zinc plated	carbon-steel	300	55	13,8	45	4	-	-	8	37	46,20
A530-6-15	Ball Transfer Unit	6	30	stainless steel	stainless steel	200	55	13,8	45	4	-	-	8	37	91,68
A530-6-16	Ball Transfer Unit	6	30	steel zinc plated	stainless steel	300	55	13,8	45	4	-	-	8	37	66,60
A545-6-13	Ball Transfer Unit	6	45	steel zinc plated	carbon-steel	610	75	19	62	4	-	-	10	53,5	102,36
A545-6-15	Ball Transfer Unit	6	45	stainless steel	stainless steel	250	75	19	62	4	-	-	10	53,5	261,00
A545-6-16	Ball Transfer Unit	6	45	steel zinc plated	stainless steel	610	75	19	62	4	-	-	10	53,5	196,80