

Ball Units Series A8 S/805



 max 600 kg  -30 °C - +70 °C

Material

_____ Ball: zinc-plated or stainless steel


_____ Housing, zinc-plated or stainless steel

Advantages

- ✓ Casing made of solid steel on the lathe
- ✓ High load capacity
- ✓ Low profile
- ✓ Several holes to let out dirt 600% better

Applications

- Haulage way
- Assembly lines

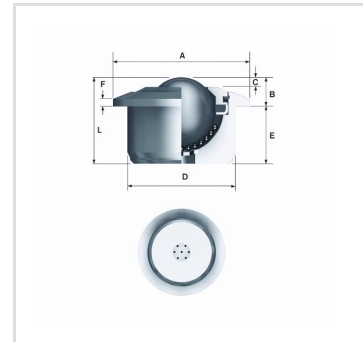

SERIES 805

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	SERIES	BALL-Ø MM	FINISH HOUSING	FINISH BALLS	LOAD CAPACITY KG	A MM	B MM	C MM	D MM	E MM	F MM	L MM	PRICE €
A805-30-13	Ball Transfer Unit	805	30	steel zinc plated	carbon-steel	350	55	13,8	6	45	23,0	3,4	36,8	47,64
A805-30-16	Ball Transfer Unit	805	30	steel zinc plated	stainless steel	350	55	13,8	6	45	23,0	3,4	36,8	59,52
A805-45-13	Ball Transfer Unit	805	45	steel zinc plated	carbon-steel	600	75	19	9	62	34,5	3,8	53,5	128,40
A805-45-15	Ball Transfer Unit	805	45	stainless steel	stainless steel	300	75	19	9	62	34,5	3,8	53,5	328,44
A805-45-16	Ball Transfer Unit	805	45	steel zinc plated	stainless steel	600	75	19	9	62	34,5	3,8	53,5	171,72