

Swivel castor 61-150 ZK

Heavy Duty Series 61 - Wheel Z

-30 °C - +80 °C

++
swivels easily

+++
wear resistant

+++
shock proof

++
floor protective

++
weather proof

Wheel



Tread: Cast polyurethane, 95±3 Shore A

Wheel centre, Cast-iron - painted

Fork




Large swivel bearing – for a long service life, zinc plated,
specially formed forklegs – high load capacity, wheel axle
bolted – locked, wheel brake

Swivel castor	Wheel-Ø A x width B mm: 150x40
Load Capacity kg:	500
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	181
Dimension of top plate TP mm:	162x133
Hole spacing HS mm:	140x105
Hole-Ø HD mm:	11
Swivel radius SR mm:	119
Wheel bearing:	Ball bearing

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 03.06.2024

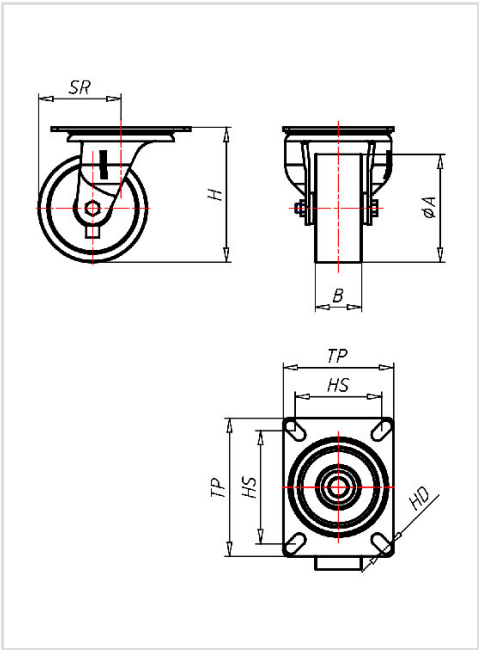

Applications

- Heavy duty dollies
- Machinery moving dollies
- Scaffolds