

Ball Transfer Unit A1008-14

Ball Units Series A-Flange - Wheel DL

 -30 °C - +70 °C


swivels easily


wear resistant


shock proof

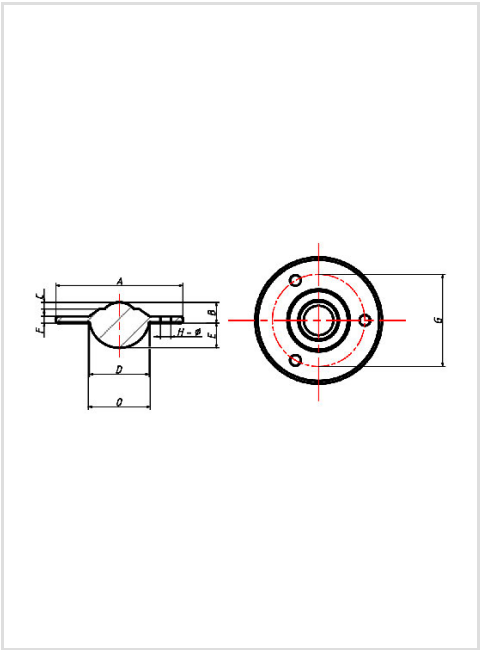

floor protective


weather proof

Wheel

Ball: zinc-plated or nylon or stainless steel with sealing lip

Housing, zinc-plated or stainless steel



Ball Transfer Unit	
Ball-Ø mm:	25
Finish housing:	steel zinc plated
Finish Balls:	nylon ball
Load Capacity up kg:	25
Load Capacity down kg:	10
A mm:	73,0
B mm:	14,2
C mm:	6,3
D mm:	37,2
E mm:	15,8
F mm:	3,5
G mm:	55,6
H mm:	5,1
Ø mm:	38,1

Advantages

- ✓ Low profile
- ✓ Several holes to let out dirt
- ✓ Sealing lip

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

Applications

- Haulage way
- Assembly lines
- Mechatronik