

Ball Transfer Unit A4001-13

Ball Units Series A-Flange - Wheel DL

 -30 °C - +70 °C


swivels easily


wear resistant


shock proof

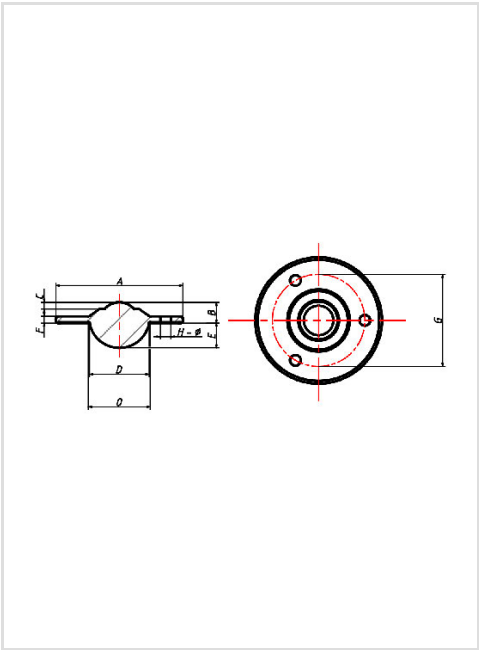

floor protective


weather proof

Wheel

Ball: zinc-plated or nylon or stainless steel with sealing lip

Housing, zinc-plated or stainless steel



Ball Transfer Unit	
Ball-Ø mm:	50
Finish housing:	steel zinc plated
Finish Balls:	carbon-steel
Load Capacity up kg:	340
Load Capacity down kg:	100
A mm:	120,7
B mm:	28,3
C mm:	14,3
D mm:	75,3
E mm:	30,2
F mm:	6,3
G mm:	92,0
H mm:	8,0
O mm:	76,0

Advantages

- ✓ Low profile
- ✓ Several holes to let out dirt
- ✓ Sealing lip

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 03.06.2024

Applications

- Haulage way
- Assembly lines
- Mechatronik