

# Ball Transfer Unit A2008-13

Ball Units Series A-Spring - Wheel S/3

 -30 °C - +70 °C

  
swivels easily

  
wear resistant

  
shock proof



  
floor protective

  
weather proof

## Wheel

Ball: zinc-plated

Housing, steel zinc-plated

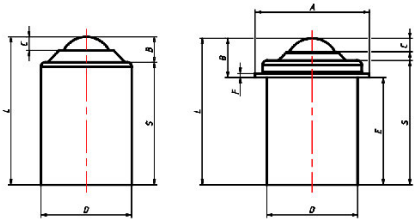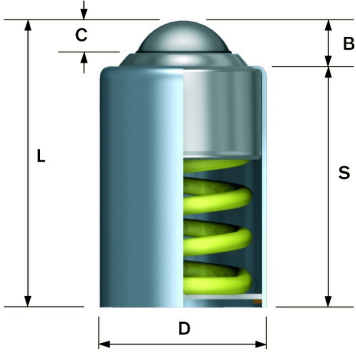

## Ball Transfer Unit

Series: 3

Ball-Ø mm: 40

Finish housing: steel zinc plated

Finish Balls: carbon-steel

Load Capacity kg: 100

Tragkraft depress kg: 190

A mm: -

B mm: 12,7

C mm: 9,1

D mm: 69,8

E mm: -

F mm: -

G mm: -

H mm: -

L mm: 107,6

S mm: 94,9

## Advantages

- ✓ No mounting plate
- ✓ Low profile
- ✓ 10% rated tolerance of spring
- ✓ Never remove the securing ring on a spring loaded Unit

©Copyright 2024 Rollenbau GmbH, [www.rollenbau.at](http://www.rollenbau.at) 02.06.2024

## Applications

- Haulage way
- Assembly lines
- Mechatronik