

Wheel 125 ALB 15

Wheels Series AL

 -30 °C - +80 °C

 **swivels easily**

 **wear resistant**

 **shock proof**



 **floor protective**

 **weather proof**

Wheel

Coated in injected polyurethane, 58±3 Shore D

High quality nylon wheel centre

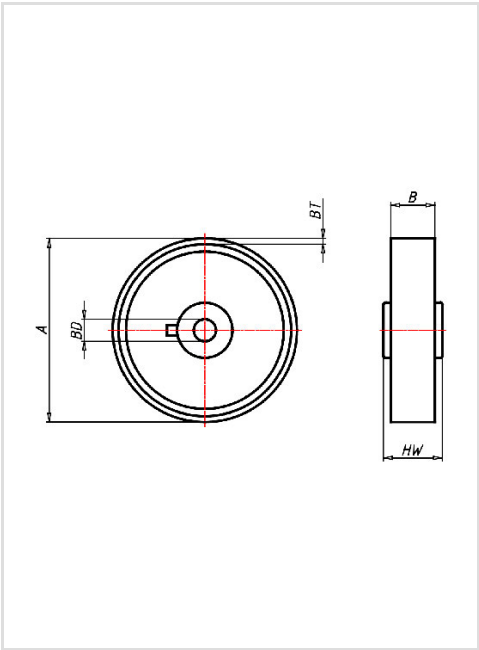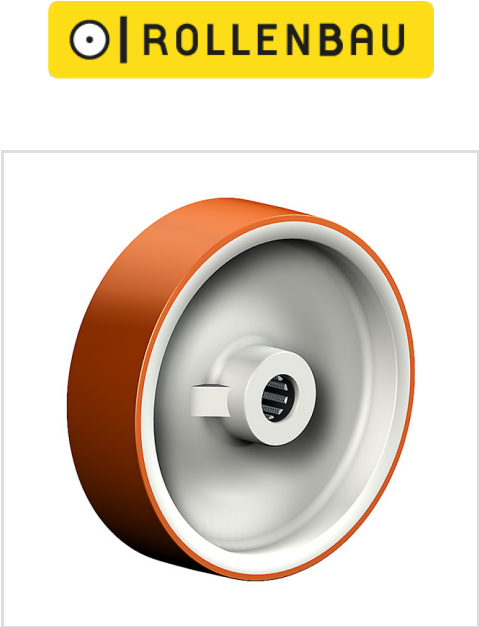

Wheel	Wheel-Ø A x width B mm: 125x30
Load Capacity kg:	230
Load capacity tested according to EN 12530 and EN 12527	
Band thickness mm:	4
Hub width mm:	40
Fixing length mm:	40
Wheel bearing:	Roller bearing
Bore diameter mm:	15

Advantages

- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ easy to clean
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

Applications

- Fork-lifts