

Wheel 250 EK 20

Forklift wheels Series E

 -20 °C - +70 °C


swivels easily


wear resistant


shock proof


floor protective


weather proof

Wheel

Tread: Elastic solid rubber tyre, black, 73±5 Shore A, vulcanised on wheel centre


Wheel centre: Die-cast aluminium alloy

Wheel	Wheel-Ø A x width B mm: 250x60
Load Capacity kg:	600
Load capacity tested according to EN 12530 and EN 12527	
Band thickness mm:	30
Hub width mm:	70
Fixing length mm:	64
Wheel bearing:	2 Ball bearings 6204 ZZ
Bore diameter mm:	20

Advantages

- ✓ excellent running performance
- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ good abrasion resistance
- ✓ corrosion resistant
- ✓ non-marking in grey

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

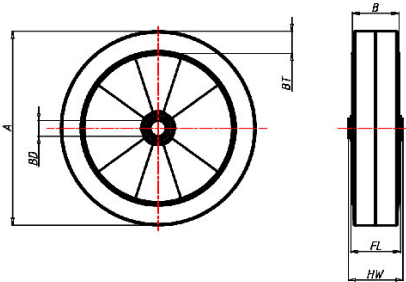

Applications

- Bins
- Refuse bins
- Trash containers
- Refuse containers