## Product data sheet Fixed castor EDDF 300 ZZK

Extra Heavy Duty Series EDD - Wheel Z

### -30 °C - +80 °C

+ +	+ + +	+ + +
swivels e	wear resistant	shock proof
+ + floor prote	+ + + weather proof	

#### Wheel

Tread: Cast polyurethane, 95±3 Shore A



Wheel centre, Cast-iron - painted



P

For applications where a super strong and durable caster is required, one tapered roller and one axial ball bearing, dust protection ring, very strong integrated Kingpin, locked nut, grease nipple, wheel axle bolted, finish – painted

Fixed castor	Wheel- $\emptyset$ A x width B mm: 300x70+70			
Load Capacity kg:	3500			
Load capacity tested according to EN 12530 and EN 12527				
Overall height H mm:	380			
Dimension of top plate TP	255x205			
mm:				
Hole spacing HS mm:	210x160			
Hole-Ø HD mm:	17			
Wheel bearing:	Ball bearing			


#### Advantages

- silent in motion
- low rolling resistance
- $\blacksquare$  high abrasion and tear resistance
- high resistance to shocks
- good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

# **⊙** | ROLLENBAU



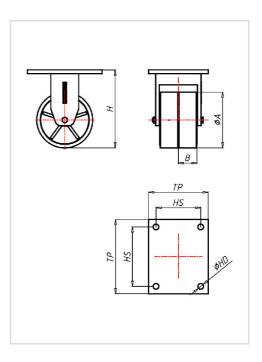

#### Applications

- Metal-Technology
- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Workshops
- Racks
- Building-Industry