


Wheel 102 TPKX 8

Wheels Series TP

 -20 °C - +60 °C


swivels easily


wear resistant


shock proof


floor protective


weather proof

Wheel

Tread: Thermoplastic elastomer coating 95±3 Shore A**


High quality nylon wheel centre

Wheel	Wheel-Ø A x width B mm: 100x32
Load Capacity kg:	90
Load capacity tested according to EN 12530 and EN 12527	
Hub width mm:	36
Fixing length mm:	36
Wheel bearing:	Cone bearing
Bore diameter mm:	8

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high resistance to shocks
- ✓ non-marking
- ✓ easy to clean
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

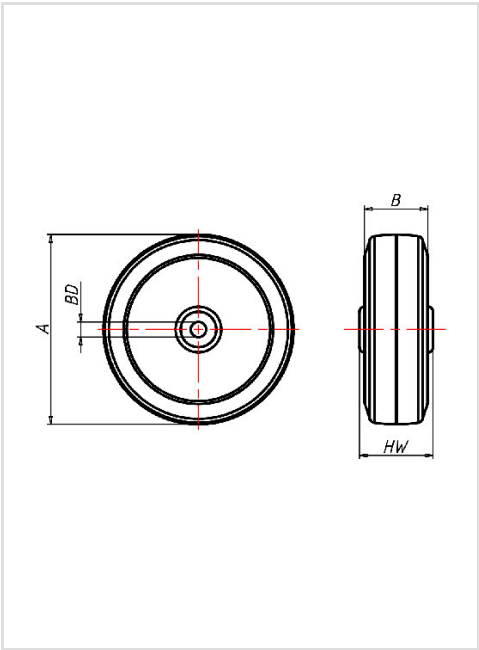

Applications

- Bins
- Refuse bins
- Trash containers
- Refuse containers