

Swivel castor XS 125 ABX



Stainless Steel Series XD - Wheel A

-30 °C - +80 °C

+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

+++
weather proof

Wheel



Coated in cast polyurethane, 95±3 Shore A

High quality nylon wheel centre

Fork




Finish: Polished stainless steel swivel fork AISI 304, stainless steel balls AISI 420, double ball bearing – revited, with dust protection ring, wheel axle bolted, total lock

Swivel castor	Wheel-Ø A x width B mm: 125x30
Load Capacity kg:	250
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	160
Dimension of top plate TP mm:	102x83
Hole spacing HS mm:	80x60
Hole-Ø HD mm:	9
Swivel radius SR mm:	113
Wheel bearing:	Roller bearing

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ easy to clean
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

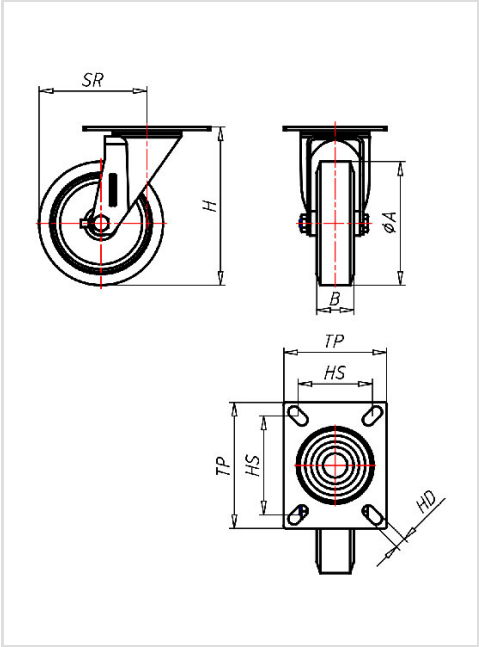

Applications

- Mechatronik
- Wet environments
- Dollies