

Swivel castor with total lock EDT 151 ZK

Extra Heavy Duty Series ED - Wheel Z

-30 °C - +80 °C

- +++

swivels easily
- +++

wear resistant
- +++

shock proof
- +++

floor protective
- +++

weather proof

Wheel



Tread: Cast polyurethane, 95±3 Shore A

Wheel centre, Cast-iron - painted

Fork



For applications where a super strong and durable caster is required,
one tapered roller and one axial ball bearing,
dust protection ring,
very strong integrated Kingpin,
locked nut, grease nipple, wheel axle bolted,
finish – painted

Swivel castor with total lock Wheel-Ø A x width B mm: 150x50

Load Capacity kg: 800

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 202

Dimension of top plate TP 135x110 mm:

Hole spacing HS mm: 105x80


Hole-Ø HD mm: 13

Swivel radius SR mm: 150

Wheel bearing: Ball bearing

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

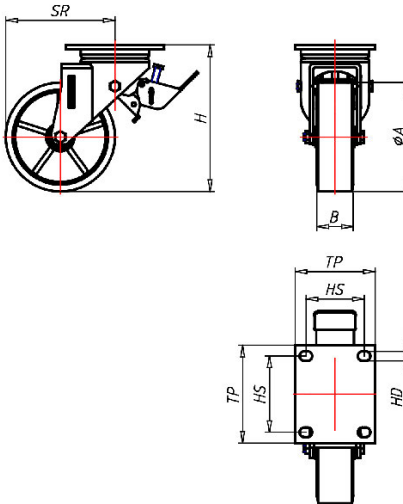

Applications

- Metal-Technology
- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Workshops
- Racks
- Building-Industry
- Carpentry