Product data sheet Fixed castor EDDF 200 ZZK

Extra Heavy Duty Series EDD - Wheel Z

-30 °C - +80 °C

+ + +	+ + +	+ + +
swivels easily	wear resistant	shock proof
+ + + floor protective	+ + + weather proof	

Wheel

Tread: Cast polyurethane, 95±3 Shore A



Wheel centre, Cast-iron - painted



P

For applications where a super strong and durable caster is required, one tapered roller and one axial ball bearing, dust protection ring, very strong integrated Kingpin, locked nut, grease nipple, wheel axle bolted, finish – painted

Fixed castor	Wheel- \varnothing A x width B mm: 200x50+50	
Load Capacity kg:	2000	
Load capacity tested accor	ding to EN 12530 and EN 12527	
Overall height H mm:	270	
Dimension of top plate TP	255x205	
mm:		
Hole spacing HS mm:	210x160	
Hole-Ø HD mm:	17	
Wheel bearing:	Ball bearing	


Advantages

- silent in motion
- low rolling resistance
- \blacksquare high abrasion and tear resistance
- high resistance to shocks
- good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

⊙ | ROLLENBAU



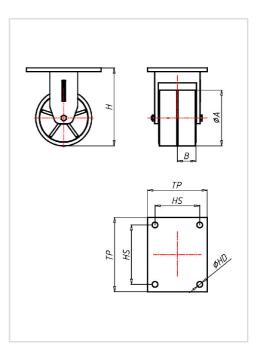

Applications

- Metal-Technology
- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Workshops
- Racks
- Building-Industry