
# Swivel castor EDD 250 ESK

Extra Heavy Duty Series EDD - Wheel ES





### Wheel

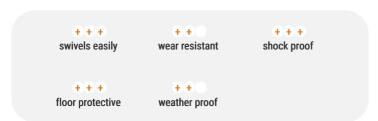

Tread: vulcanized elastic solid rubber tyre 73±5 Shore A

Wheel Center: Strong steel welded construction - zinc plated



For applications where a super strong and durable caster is required,

one tapered roller and one axial ball bearing, dust protection ring, very strong integrated Kingpin, locked nut, grease nipple, wheel axle bolted,

finish - painted

Swivel castor	Wheel-Ø A x width B mm: 250x100
Load Capacity kg:	1000
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	323
Dimension of top plate TP	255x205
mm:	
Hole spacing HS mm:	210x160
Hole-Ø HD mm:	17
Swivel radius SR mm:	153
Wheel bearing:	Ball bearing


### **Advantages**

- excellent running performance
- low rolling resistance
- silent in motion
- ☑ high abrasion resistance
- high load capacity

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024





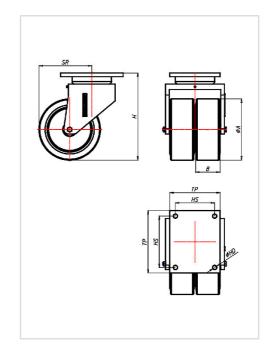

## **Applications**

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks