

Fixed castor QDF 125 QK

Extra Heavy Duty Series QD - Wheel Q

-30 °C - +80 °C

+++
swivels easily

+++
wear resistant

+++
shock proof

+
floor protective

+++
weather proof

Wheel



Casted iron wheel, painted, round machined tread

Fork




Pressed steel welded construction,
with axial ball bearing and tapered roller bearing,
dust protection ring,
very strong integrated Kingpin,
grease nipple,
wheel axle with self-locking nut finish: zinc plated

| | |
|---|--------------------------------|
| Fixed castor | Wheel-Ø A x width B mm: 125x44 |
| Load Capacity kg: | 600 |
| Load capacity tested according to EN 12530 and EN 12527 | |
| Overall height H mm: | 177 |
| Dimension of top plate TP mm: | 150x110 |
| Hole spacing HS mm: | 105x80/121x59 |
| Hole-Ø HD mm: | 12,5 |
| Wheel bearing: | Ball bearing |

Advantages

- ✓ easy running on smooth floors
- ✓ very high load capacity
- ✓ excellent abrasion resistance
- ✓ with plain or ball bearing for high temperatures

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

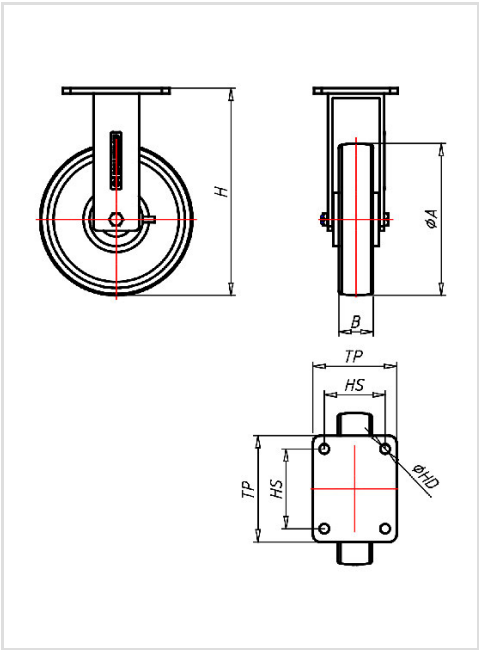

Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks