
Product data sheet Fixed castor QDF 250 CIB Extra Heavy Duty Series QD - Wheel Q

-30 °C - +80 °C



Wheel



Casted iron wheel, painted, round machined tread

Fork



Pressed steel welded construction, with axial ball bearing and tapered roller bearing, dust protection ring, very strong integrated Kingpin, grease nipple, wheel axle with self-locking nut finish: zinc plated

Fixed castor	Wheel- \emptyset A x width B mm: 250x51
Load Capacity kg:	1200
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	300
Dimension of top plate TP	150x110
mm:	
Hole spacing HS mm:	105x80/121x59
Hole-Ø HD mm:	12,5
Wheel bearing:	Roller bearing


Advantages

- easy running on smooth floors
- very high load capacity
- excellent abrasion resistance
- signification with the second second

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

<mark>⊙ | ROLLENB</mark>AU



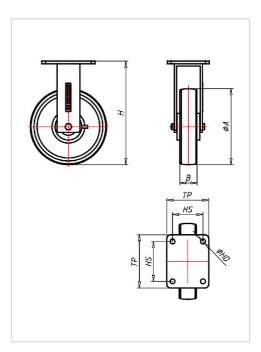

Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks