

Swivel castor with total lock QDT 125 CIB

Extra Heavy Duty Series QD - Wheel Q

-30 °C - +80 °C

- +++

swivels easily
- +++

wear resistant
- +++

shock proof
- + ● ●

floor protective
- +++

weather proof

Wheel



Casted iron wheel, painted, round machined tread

Fork



Pressed steel welded construction, with axial ball bearing and tapered roller bearing, dust protection ring, very strong integrated Kingpin, grease nipple, wheel axle with self-locking nut finish: zinc plated

Swivel castor with total lock Wheel-Ø A x width B mm: 125x41

Load Capacity kg: 630

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 177

Dimension of top plate TP 150x110 mm:

Hole spacing HS mm: 105x80/121x59

Hole-Ø HD mm: 12,5

Swivel radius SR mm: 125


Wheel bearing: Roller bearing

Advantages

- ✓ easy running on smooth floors
- ✓ very high load capacity
- ✓ excellent abrasion resistance
- ✓ with plain or ball bearing for high temperatures

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

ROLLENBAU

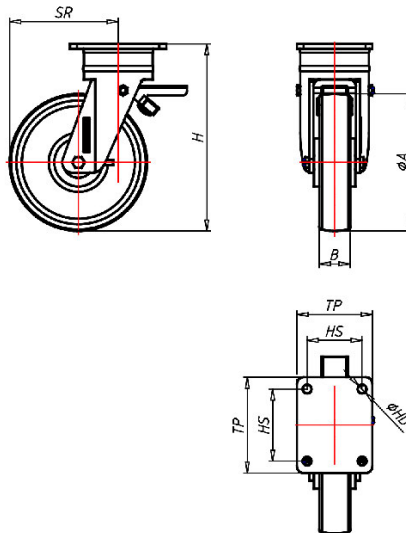

Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks