Product data sheet

Swivel castor with total lock QDT 125 QK

⊙ | ROLLENBAU

Extra Heavy Duty Series QD - Wheel Q

-30 °C - +80 °C





Casted iron wheel, painted, round machined tread



Pressed steel welded construction, with axial ball bearing and tapered roller bearing, dust protection ring, very strong integrated Kingpin, grease nipple, wheel axle with self-locking nut finish: zinc plated


Swivel castor with total lock Wheel- \varnothing A x width B mm: 125x44	
Load Capacity kg:	600
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	177
Dimension of top plate TP	150x110
mm:	
Hole spacing HS mm:	105x80/121x59
Hole-Ø HD mm:	12,5
Swivel radius SR mm:	125
Wheel bearing:	Ball bearing

Advantages

- easy running on smooth floors
- very high load capacity
- excellent abrasion resistance
- $\hfill {\hfill}$ with plain or ball bearing for high temperatures

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024



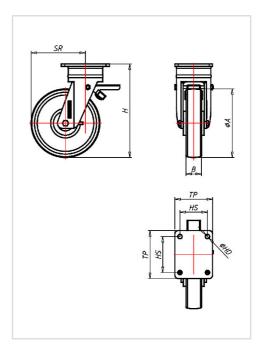

Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks