

Swivel castor QD 250 LZK

Extra Heavy Duty Series QD - Wheel Z

 -30 °C - +80 °C


 swivels easily


 wear resistant


 shock proof


 floor protective


 weather proof

Wheel



Tread: Cast polyurethane, 95±3 Shore A

Wheel centre, Cast-iron - painted

Fork



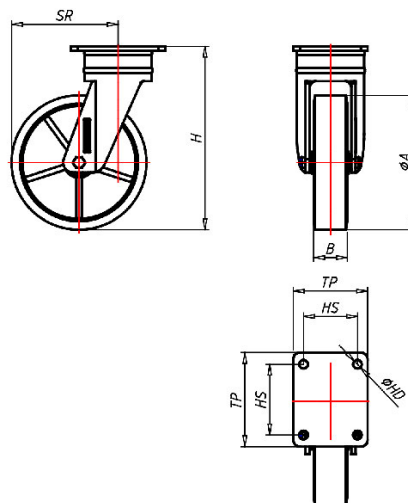
Pressed steel welded construction,
 with axial ball bearing and tapered roller bearing,
 dust protection ring,
 very strong integrated Kingpin,
 grease nipple,
 wheel axle with self-locking nut finish: zinc plated

Swivel castor	Wheel-Ø A x width B mm: 250x60
Load Capacity kg:	1400
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	300
Dimension of top plate TP mm:	150x110
Hole spacing HS mm:	105x80/121x59
Hole-Ø HD mm:	12,5
Swivel radius SR mm:	197
Wheel bearing:	Ball bearing

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

 ROLLENBAU


Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks