

Ball Units Series A-Flange




 max 125 kg  -30 °C - +70 °C

Material

Ball: zinc-plated or nylon or stainless steel

Housing, zinc-plated or stainless steel

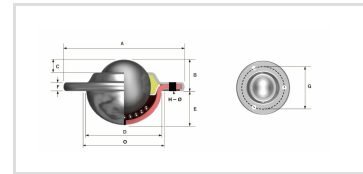

Advantages

- ✓ Low profile
- ✓ Several holes to let out dirt

Applications

- Haulage way
- Assembly lines
- Mechatronik

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	SERIES	BALL-Ø MM	FINISH HOUSING	FINISH BALLS	LOAD CAPACITY UP KG	LOAD CAPACITY DOWN KG	A MM	B MM	C MM	D MM	E MM	F MM	G MM	H MM	O MM	PRICE €
A3016-13	Ball Transfer Unit		15	steel zinc plated	carbon-steel	12	6	41,3	10,2	4,0	22,2	8,3	3,2	30,0	3,5	23,0	7,92
A3016-14	Ball Transfer Unit		15	steel zinc plated	nylon ball	8	4	41,3	10,2	4,0	22,2	8,3	3,2	30,0	3,5	23,0	12,36
A3016-15	Ball Transfer Unit		15	stainless steel	stainless steel	12	6	41,3	10,2	4,0	22,2	8,3	3,2	30,0	3,5	23,0	18,60
A3016-16	Ball Transfer Unit		15	steel zinc plated	stainless steel	12	6	41,3	10,2	4,0	22,2	8,3	3,2	30,0	3,5	23,0	14,88
A3025-13	Ball Transfer Unit		25	steel zinc plated	carbon-steel	55	25	56,0	14,6	7,3	34,7	14,6	4,0	45,5	4,5	35,0	9,96
A3025-14	Ball Transfer Unit		25	steel zinc plated	nylon ball	25	10	56,0	14,6	7,3	34,7	14,6	4,0	45,5	4,5	35,0	17,28
A3025-15	Ball Transfer Unit		25	stainless steel	stainless steel	55	25	56,0	14,6	7,3	34,7	14,6	4,0	45,5	4,5	35,0	29,64
A3025-16	Ball Transfer Unit		25	steel zinc plated	stainless steel	55	25	56,0	14,6	7,3	34,7	14,6	4,0	45,5	4,5	35,0	21,96
A1022-13	Ball Transfer Unit		32	steel zinc plated	carbon-steel	125	55	73,7	16,2	8,0	45,5	19,9	4,2	58,7	5,1	46,0	22,56
A1022-15	Ball Transfer Unit		32	stainless steel	stainless steel	125	55	73,7	16,2	8,0	45,5	19,9	4,2	58,7	5,1	46,0	57,96
A1022-16	Ball Transfer Unit		32	steel zinc plated	stainless steel	125	55	73,7	16,2	8,0	45,5	19,9	4,2	58,7	5,1	46,0	34,68