

Ball Units Series A-Spring S/1




 max 410 kg  -30 °C - +70 °C

Material

Ball: zinc-plated

Housing, steel zinc-plated

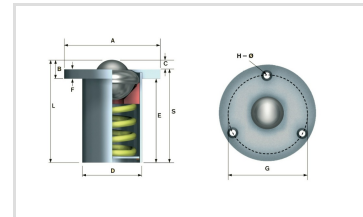

SERIES 1

Advantages

- ✓ Large top mounting plate
- ✓ Low profile
- ✓ 10% rated tolerance of spring
- ✓ Never remove the securing ring on a spring loaded Unit

Applications

- Haulage way
- Assembly lines
- Mechatronik

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	SERIES	BALL- Ø MM	FINISH HOUSING	FINISH BALLS	LOAD CAPACITY KG	TRAGKRAFT DEPRESS KG	A MM	B MM	C MM	D MM	E MM	F MM	G MM	H MM	L MM	S MM	PRICE €
A3011-13	Ball Transfer Unit	1	19	steel zinc plated	carbon-steel	10	30	66,6	11,4	3,5	36,5	51,6	7,9	50,8	3x7	63,0	59,5	150,96
A1018-13	Ball Transfer Unit	1	25,4	steel zinc plated	carbon-steel	35	100	75,0	13,8	5,9	44,5	53,3	7,9	60,3	3x7	67,1	61,2	184,92
A1507-13	Ball Transfer Unit	1	25,4	steel zinc plated	carbon-steel	50	130	71,3	19,3	6,7	44,5	52,9	2,0	60,4	2x5,1	72,2	61,3	102,48
A1028-13	Ball Transfer Unit	1	32	steel zinc plated	carbon-steel	100	180	89,0	17,0	7,5	60	77,5	9,5	73,0	3x7	94,6	87,1	269,76
A2010-13	Ball Transfer Unit	1	40	steel zinc plated	carbon-steel	100	170	101,6	17,7	8,2	69,8	90,0	9,5	85,7	3x9	107,7	99,5	367,08
A4008-13	Ball Transfer Unit	1	50	steel zinc plated	carbon-steel	170	410	152,4	25,7	13,0	101,6	114,0	12,7	127,0	3x9	139,7	126,7	849,84