

Ball Units Series A-Spring S/4



 max 410 kg  -30 °C - +70 °C

Material

Ball: zinc-plated


Housing, steel zinc-plated

Advantages

- ✓ Small top mounting plate
- ✓ Low profile
- ✓ 10% rated tolerance of spring
- ✓ Never remove the securing ring on a spring loaded Unit

Applications

- Haulage way
- Assembly lines
- Mechatronik

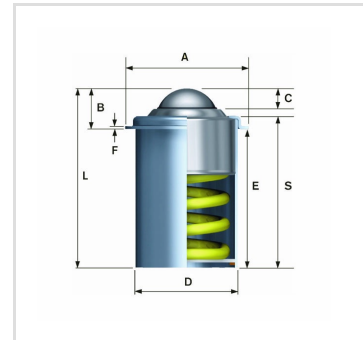

SERIES 4

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	SERIES	BALL-Ø MM	FINISH HOUSING	FINISH BALLS	LOAD CAPACITY KG	TRAGKRAFT DEPRESS KG	A MM	B MM	C MM	D MM	E MM	F MM	G MM	H MM	L MM	S MM	PRICE €
A3010-13	Ball Transfer Unit	4	19	steel zinc plated	carbon-steel	10	30	45,0	11,4	3,5	36,5	51,6	7,9	-	-	63,0	59,5	127,44
A1027-13	Ball Transfer Unit	4	25,4	steel zinc plated	carbon-steel	100	180	75,0	17,0	7,5	60,0	77,5	9,5	-	-	94,6	87,1	268,56
A2009-13	Ball Transfer Unit	4	40	steel zinc plated	carbon-steel	100	170	75,0	17,7	8,2	69,8	90,0	9,5	-	-	107,7	99,5	340,32
A4007-13	Ball Transfer Unit	4	50	steel zinc plated	carbon-steel	170	410	114,3	25,7	13,0	101,6	114,0	12,7	-	-	139,7	126,7	790,92