

Ball Units Series A5 S/0

 max 610 kg  -30 °C - +70 °C

Material

Ball: zinc-plated or nylon or stainless steel


Housing, zinc-plated or stainless steel

Advantages

- ✓ bearing shell made of specially hardened steel
- ✓ Several holes to let out dirt
- ✓ Sealing lip made of wool felt

Applications

- Haulage way
- Assembly lines

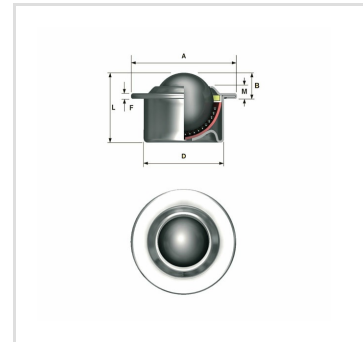

SERIES 0

Dimensions

ARTICLE NUMBER	ARTICLE TYPE	SERIES	BALL-Ø MM	FINISH HOUSING	FINISH BALLS	LOAD CAPACITY KG	A MM	B MM	D MM	F MM	G MM	H MM	M MM	L MM	PRICE €
A515-0-13	Ball Transfer Unit	0	15	steel zinc plated	carbon-steel	60	31	9,5	24	2,8	-	-	6	21	12,72
A515-0-14	Ball Transfer Unit	0	15	steel zinc plated	nylon ball	10	31	9,5	24	2,8	-	-	6	21	16,44
A515-0-15	Ball Transfer Unit	0	15	stainless steel	stainless steel	38	31	9,5	24	2,8	-	-	6	21	32,04
A515-0-16	Ball Transfer Unit	0	15	steel zinc plated	stainless steel	60	31	9,5	24	2,8	-	-	6	21	28,56
A522-0-13	Ball Transfer Unit	0	22	steel zinc plated	carbon-steel	160	45	9,8	36	2,8	-	-	6	30	17,40
A522-0-14	Ball Transfer Unit	0	22	steel zinc plated	nylon ball	20	45	9,8	36	2,8	-	-	6	30	24,00
A522-0-15	Ball Transfer Unit	0	22	stainless steel	stainless steel	100	45	9,8	36	2,8	-	-	6	30	37,92
A522-0-16	Ball Transfer Unit	0	22	steel zinc plated	stainless steel	160	45	9,8	36	2,8	-	-	6	30	28,20
A530-0-13	Ball Transfer Unit	0	30	steel zinc plated	carbon-steel	300	55	13,8	45	4	-	-	8,3	37	32,76
A530-0-14	Ball Transfer Unit	0	30	steel zinc plated	nylon ball	25	55	13,8	45	4	-	-	8,3	37	61,92
A530-0-15	Ball Transfer Unit	0	30	stainless steel	stainless steel	200	55	13,8	45	4	-	-	8,3	37	78,84
A530-0-16	Ball Transfer Unit	0	30	steel zinc plated	stainless steel	300	55	13,8	45	4	-	-	8,3	37	66,00
A545-0-13	Ball Transfer Unit	0	45	steel zinc plated	carbon-steel	610	75	19	62	4	-	-	10	53,5	87,84
A545-0-15	Ball Transfer Unit	0	45	stainless steel	stainless steel	250	75	19	62	4	-	-	10	53,5	244,32
A545-0-16	Ball Transfer Unit	0	45	steel zinc plated	stainless steel	610	75	19	62	4	-	-	10	53,5	168,72