

Ball Units Series A5 S/4



 max 300 kg  -30 °C - +70 °C

Material

_____ Ball: zinc-plated or nylon or stainless steel


_____ Housing, zinc-plated or stainless steel

Advantages

- ✓ bearing shell made of specially hardened steel
- ✓ Several holes to let out dirt
- ✓ Sealing lip made of wool felt
- ✓ Coned outer ring

Applications

- Haulage way
- Assembly lines

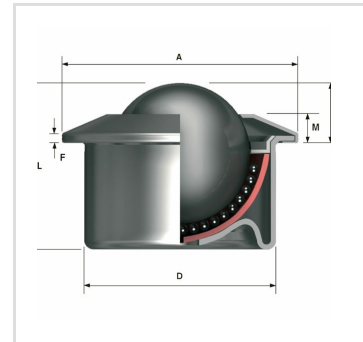

SERIES 4 - CONED OUTERRING

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	SERIES	BALL-Ø MM	FINISH HOUSING	FINISH BALLS	LOAD CAPACITY KG	A MM	B MM	D MM	F MM	G MM	H MM	M MM	L MM	PRICE €
A515-4-13	Ball Transfer Unit	4	15	steel zinc plated	carbon-steel	60	31	9,5	24	2,8	29	3,5	6	21	12,72
A515-4-14	Ball Transfer Unit	4	15	steel zinc plated	nylon ball	10	31	9,5	24	2,8	29	3,5	6	21	17,16
A515-4-15	Ball Transfer Unit	4	15	stainless steel	stainless steel	38	31	9,5	24	2,8	29	3,5	6	21	31,08
A515-4-16	Ball Transfer Unit	4	15	steel zinc plated	stainless steel	60	31	9,5	24	2,8	29	3,5	6	21	27,24
A522-4-13	Ball Transfer Unit	4	22	steel zinc plated	carbon-steel	160	45	9,8	36	2,8	-	-	6	30	16,80
A522-4-14	Ball Transfer Unit	4	22	steel zinc plated	nylon ball	20	45	9,8	36	2,8	-	-	6	30	25,44
A522-4-15	Ball Transfer Unit	4	22	stainless steel	stainless steel	100	45	9,8	36	2,8	-	-	6	30	37,92
A522-4-16	Ball Transfer Unit	4	22	steel zinc plated	stainless steel	160	45	9,8	36	2,8	-	-	6	30	29,76
A530-4-13	Ball Transfer Unit	4	30	steel zinc plated	carbon-steel	300	55	13,8	45	4	-	-	8,3	37	31,08
A530-4-14	Ball Transfer Unit	4	30	steel zinc plated	nylon ball	25	55	13,8	45	4	-	-	8,3	37	61,92
A530-4-15	Ball Transfer Unit	4	30	stainless steel	stainless steel	200	55	13,8	45	4	-	-	8,3	37	78,36
A530-4-16	Ball Transfer Unit	4	30	steel zinc plated	stainless steel	300	55	13,8	45	4	-	-	8,3	37	66,00