

Ball Units Series A8 S800



 max 1500 kg  -30 °C - +70 °C

Material

 Ball: zinc-plated or stainless steel


 Housing, zinc-plated or stainless steel

Advantages

- ✓ Casing made of solid steel on the lathe
- ✓ High load capacity
- ✓ Low profile
- ✓ Holes to let out dirt

Applications

- Haulage way
- Assembly lines

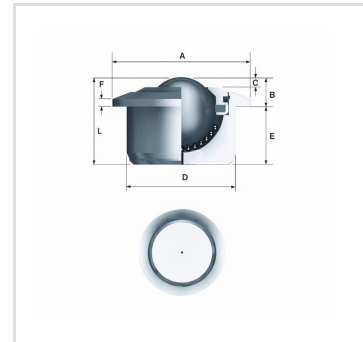

SERIES 800

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	SERIES	BALL-Ø MM	FINISH HOUSING	FINISH BALLS	LOAD CAPACITY KG	A MM	B MM	C MM	D MM	E MM	F MM	L MM	PRICE €
A800-22-13	Ball Transfer Unit	800	22	steel zinc plated	carbon-steel	180	45	9,8	4	36	20,7	3	30,5	41,16
A800-22-15	Ball Transfer Unit	800	22	stainless steel	stainless steel	120	45	9,8	4	36	20,7	3	30,5	90,72
A800-22-16	Ball Transfer Unit	800	22	steel zinc plated	stainless steel	180	45	9,8	4	36	20,7	3	30,5	48,48
A800-30-13	Ball Transfer Unit	800	30	steel zinc plated	carbon-steel	350	55	13,8	6	45	23,0	3,4	36,8	57,72
A800-30-15	Ball Transfer Unit	800	30	stainless steel	stainless steel	200	55	13,8	6	45	23,0	3,4	36,8	122,28
A800-30-16	Ball Transfer Unit	800	30	steel zinc plated	stainless steel	350	55	13,8	6	45	23,0	3,4	36,8	66,12
A800-45-13	Ball Transfer Unit	800	45	steel zinc plated	carbon-steel	600	75	19	9	62	34,5	3,8	53,5	134,40
A800-45-15	Ball Transfer Unit	800	45	stainless steel	stainless steel	300	75	19	9	62	34,5	3,8	53,5	327,72
A800-45-16	Ball Transfer Unit	800	45	steel zinc plated	stainless steel	600	75	19	9	62	34,5	3,8	53,5	168,12
A800-60-13	Ball Transfer Unit	800	60	steel zinc plated	carbon-steel	1500	117	29,5	17	100	48,0	5	77,5	450,12
A800-60-15	Ball Transfer Unit	800	60	stainless steel	stainless steel	1000	117	29,5	17	100	48,0	5	77,5	1138,44
A800-60-16	Ball Transfer Unit	800	60	steel zinc plated	stainless steel	1500	117	29,5	17	100	48,0	5	77,5	826,08