

Ball Units Series Glastransport V



 max 20 kg 

Material


Ball made of Vulkopan 90 Shore A

L = Left; R = Right
Ball in gray rubber, red polyurethane or nylon available on request
Stems and fittings in stainless steel available on request §§

Advantages

- ✓ excellent tear resistance
- ✓ non-marking
- ✓ high wear resistance

L = Left; R = Right

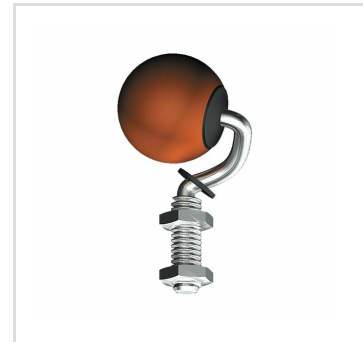

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	BALL-Ø MM	LOAD CAPACITY KG	B MIN/MAX MM	D MM	E MM	C MM	FINISH	PRICE €
SPVR 35/55	Ball Transfer Unit Glass	35	12	54/71	92	14	55	R	35,52
SPVR 35/75	Ball Transfer Unit Glass	35	12	54/71	87	14	75	R	41,88
SPVL 35/55	Ball Transfer Unit Glass	35	12	54/71	92	14	55	L	38,28
SPVL 35/75	Ball Transfer Unit Glass	35	12	54/71	87	14	75	L	41,88
SPVR 50/100	Ball Transfer Unit Glass	35	20	69/91	107	14	100	R	48,96
SPVL 50/100	Ball Transfer Unit Glass	50	20	69/91	107	14	100	L	48,96