

Extra Heavy Duty Series ED, Wheel TLS

 max 700 kg  -20 °C - +80 °C  125-200 mm

+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

+++
weather proof

Material



Tread: cast polyurethane, 70±3 Shore A
Core: Die-cast aluminium alloy

Material Fork



For applications where a super strong and durable caster is required,
one tapered roller and one axial ball bearing,
dust protection ring,
very strong integrated Kingpin,
locked nut, grease nipple, wheel axle bolted,
finish – painted

Advantages

- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Racks






SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

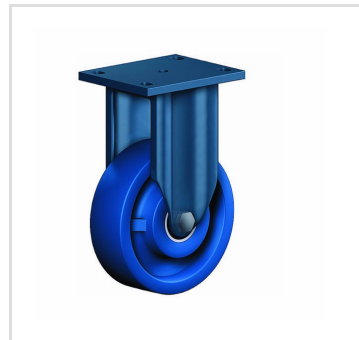

FIXED CASTOR

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
ED 125 TLSK	Swivel castor	125x50	500	172	135x110	105x80	11	115		219,12
EDF 125 TLSK	Fixed castor	125x50	500	172	135x110	105x80	11			108,24
ED 151 TLSK	Swivel castor	150x50	550	202	135x110	105x80	13	142		259,68
EDT 151 TLSK	Swivel castor with total lock	150x50	550	202	135x110	105x80	13	150		303,48
EDF 151 TLSK	Fixed castor	150x50	550	202	135x110	105x80	13			137,04
ED 200 TLSK	Swivel castor	200x50	700	251	135x110	105x80	13	172		288,00
EDT 200 TLSK	Swivel castor with total lock	200x50	700	251	135x110	105x80	13	172		351,36
EDF 200 TLSK	Fixed castor	200x50	700	251	135x110	105x80	13			179,52