

Forklift wheels Series RP



max 1000 kg -20 °C - +80 °C 39-85 mm

++

swivels easily

+++

wear resistant

+++


shock proof

++

floor protective

+++

weather proof

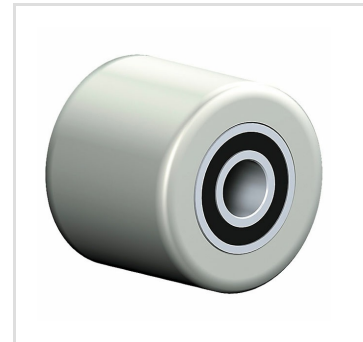

Material

high quality nylon wheel

Advantages

- ✓ easy running on smooth floors
- ✓ impact proof
- ✓ high abrasion resistance
- ✓ high chemical resistance

Applications

- Fork-lifts

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	HUB WIDTH MM	FIXING LENGTH MM	WHEEL BEARING	BORE DIAMETER MM	PRICE €
RP 39x46-17	Wheel	39x46	200	46	46		17	2,64
RP 50x32-14	Wheel	50x32	120	34	34		14	2,64
RP 75x65 K20	Wheel	75x66	500	66	64,2		20	44,04
RP 75x65 K25	Wheel	75x66	500	66	64,2		25	45,12
RP 82x60 K20	Wheel	82x60	600	60	56		20	49,08
RP 82x60 K25	Wheel	82x60	600	60	56		25	50,40
RP 82x70 K20	Wheel	82x70	700	70	66		20	45,60
RP 82x70 K25	Wheel	82x70	700	70	66		25	47,76
RP 82x100 K20	Wheel	82x100	1000	100	96		20	52,20
RP 82x100 K25	Wheel	82x100	1000	100	96		25	54,72
RP 85x60 K20	Wheel	85x60	600	60	60		20	48,48
RP 85x60 K25	Wheel	85x60	600	60	60		25	49,20
RP 85x70 K20	Wheel	85x70	700	70	70		20	49,20
RP 85x70 K25	Wheel	85x70	700	70	70		25	50,52
RP 85x85 K20	Wheel	85x85	800	85	85		20	54,60
RP 85x85 K25	Wheel	85x85	800	85	85		25	55,32
RP 85x90 K20	Wheel	85x90	900	90	90		20	54,00
RP 85x90 K25	Wheel	85x90	900	90	90		25	54,96
RP 85x100 K20	Wheel	85x100	1000	100	100		20	58,80
RP 85x100 K25	Wheel	85x100	1000	100	100		25	59,64