


Heat Series CRH, Wheel HB



max 230 kg -20 °C - +120 °C 100-200 mm

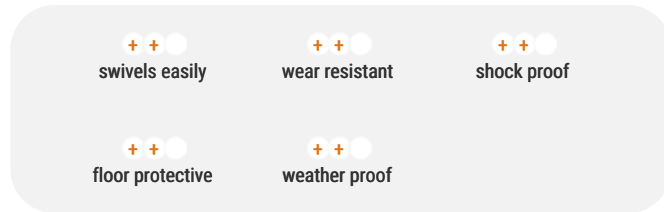

Material



Standard rubber tyre black, heat-resistant
Bolted steel rim, zinc-plated

Material Fork



Finish: electro-zinc plated, double ball bearing – revited, hardened
steel balls, high melting point grease, wheel axle bolted

Advantages

- ✓ heat resistant
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

Applications

- Bread racks



SWIVEL CASTOR

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
CRH 100 HBX	Swivel castor	100x30	80	128	12,5	88		67,80
CRSH 125 HBX	Swivel castor	125x38	120	160	12,5	113		97,56
CRH 160 HBX	Swivel castor	160x40	180	203	12,5	138		147,96
CRH 200 HBX	Swivel castor	200x50	230	240	12,5	161		169,80