

Heavy Duty Series PD, Wheel ELPG



 max 500 kg  -10 °C - +60 °C  125-200 mm

+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

+++
weather proof

Material



Elastic solid rubber tyre 70 ± 5 Shore A electrically conductive
volume resistance value $<10^4 \Omega$
High quality nylon wheel centre electrically conductive
volume resistance value $<10^4 \Omega$

Material Fork



Finish: electro-zinc plated, hardened steel balls, double ball race
– hardened steel sheet, with strong Kingpin bolted and locked –
adjustable, thermoplastic dust protection ring and seal, wheel axle
bolted, adjustable total lock – leading or trailing available

Advantages

- ✓ electrically conductive
- ✓ excellent running performance
- ✓ low rolling resistance
- ✓ good abrasion resistance
- ✓ korrosionsbeständig
- ✓ non-marking

Applications


- Heavy duty dollies
- Machinery moving dollies
- Scaffolds
- Racks



SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

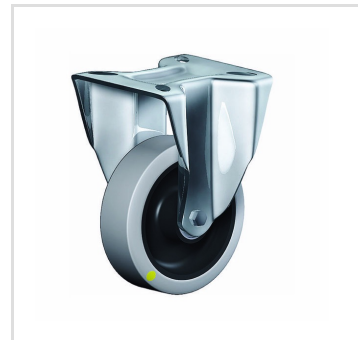

FIXED CASTOR

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
PD 125 ELPGB	Swivel castor	125x40	225	164	135x110	105x80	10,5	106		101,16
PDT 125 ELPGB	Swivel castor with total lock	125x40	225	164	135x110	105x80	10,5	140		124,44
PDF 125 ELPGB	Fixed castor	125x40	225	164	135x110	105x80	10,5			80,88
PS 160 ELPGK	Swivel castor	160x45	300	200	135x110	105x80	10,5	130		136,20
PST 160 ELPGK	Swivel castor with total lock	160x45	300	200	135x110	105x80	10,5	140		157,80
PSF 160 ELPGK	Fixed castor	160x45	300	200	135x110	105x80	10,5			115,08
PD 200 ELPGK	Swivel castor	200x50	500	250	135x110	105x80	12,5	167		180,24
PDT 200 ELPGK	Swivel castor with total lock	200x50	500	250	135x110	105x80	12,5	170		216,96
PDF 200 ELPGK	Fixed castor	200x50	500	250	135x110	105x80	12,5			144,96