

Heavy Duty Series PD, Wheel TLSBA



max 775 kg -20 °C - +80 °C 125-200 mm

+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

+++
weather proof

Material



Tread: cast polyurethane, 85 ± 2 Shore A crowned - soft
Core: Die-cast aluminium alloy

Material Fork



Finish: electro-zinc plated, hardened steel balls, double ball race
– hardened steel sheet, with strong Kingpin bolted and locked –
adjustable, thermoplastic dust protection ring and seal, wheel axle
bolted, adjustable total lock – leading or trailing available

Advantages


- ✓ crowned soft tread makes it very economic
- ✓ very silent in motion
- ✓ very low rolling resistance
- ✓ very revving
- ✓ high abrasion and tear resistance
- ✓ good chemical resistance

Applications

- Metal-Technology
- Heavy duty dollies
- Machinery moving dollies
- Scaffolds
- Workshops
- Racks
- Building-Industry
- Carpentry



SWIVEL CASTOR

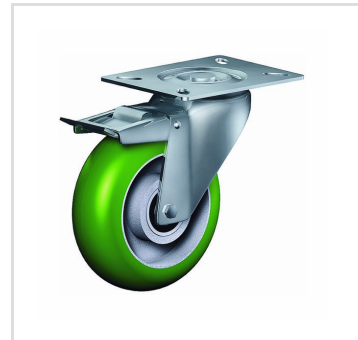

SWIVEL CASTOR WITH TOTAL LOCK



FIXED CASTOR

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
PS 125 TLSBAK	Swivel castor	125x50	450	174	135x110	105x80	12,5	118		162,12
PST 125 TLSBAK	Swivel castor with total lock	125x50	450	174	135x110	105x80	12,5	170		193,56
PSF 125 TLSBAK	Fixed castor	125x50	450	174	135x110	105x80	12,5			125,16
PS 150 TLSBAK	Swivel castor	150x50	575	203	135x110	105x80	12,5	127		176,52
PST 150 TLSBAK	Swivel castor with total lock	150x50	575	203	135x110	105x80	12,5	140		214,68
PSF 150 TLSBAK	Fixed castor	150x50	575	203	135x110	105x80	12,5			143,52
PD 200 TLSBAK	Swivel castor	200x50	775	250	135x110	105x80	12,5	167		190,68
PDT 200 TLSBAK	Swivel castor with total lock	200x50	775	250	135x110	105x80	12,5	170		229,80
PDF 200 TLSBAK	Fixed castor	200x50	775	250	135x110	105x80	12,5			157,56