


Hospital Castor Series 390K, Wheel TP



max 120 kg -20 °C - +80 °C 125-150 mm

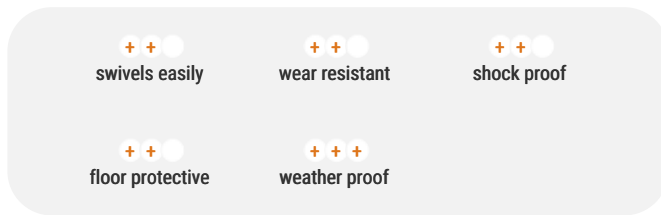

Material



Thermoplastic polyurethane tyre iron grey RAL 7011, 95 Shore A**, NON-MARKING
Core: plastic wheel centre and thread guard, silver grey RAL 7001, precision ball bearing

Material Fork



Finish: zinc passivated or chrome-plated, protected from dust and water ingress by plastic sealing ring or with highquality plastic cover (white RAL 9010 or metallic) suitable for disinfecting cubicle, double ball bearing in swivel head series, integrated selection mechanism with total lock or directional and total lock, continually greased

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ non-marking
- ✓ good chemical resistance

Applications

- Hospital beds



WITH TOTAL OR TOTAL AND DIRECTIONAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	STERN MM	TRANSVERSE BORE MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
390K S 127 TPK	Swivel castor with total lock	125x32	100	158	27,8	M8x19	106,5		auf Anfrage
390K SR 127 TPK	SWIVEL CASTOR with total and directional Lock	125x32	100	158	27,8	M8x19	106,5		auf Anfrage
390K S 150 TPK	Swivel castor with total lock	150x32	120	184	27,8	M8x19	126		108,96
390K SR 150 TPK	SWIVEL CASTOR with total and directional Lock	150x32	120	184	27,8	M8x19	126		auf Anfrage