

Institutional Series 315P, Wheel SKA



max 60 kg -20 °C - +60 °C 76-100 mm

swivels easily

wear resistant

shock proof

floor protective

weather proof

Material



Skate wheel with polyurethane tyre, transparent
High quality nylon wheel centre

Material Fork




Finish: zinc plated and chromate coated, large double ball bearing
– Ø 46 mm, revited,
dust protection ring, wheel axle bolted and locked, wheel-/ total
lock – spring stainless steel

Advantages

- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ non-marking
- ✓ attractive appearance
- ✓ good chemical resistance

Applications

- Portable bar units
- Metal-Technology
- Workshops
- Book carts
- Sidetables
- Laboratory equipment
- Instrument stands
- School furniture
- Carpentry
- Health-Professionals

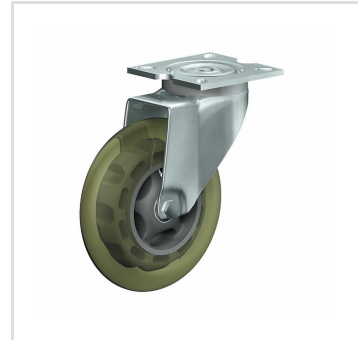

SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK



FIXED CASTOR

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
315 PT 75 SKA	Swivel castor	76x24	45	97	58x58	40x40/42x42	6,2	68		55,32
316 PT 75 SKA	Swivel castor with total lock	76x24	45	97	58x58	40x40/42x42	6,2	83		61,44
670 PT 75 SKA	Fixed castor	76x24	45	97	58x58	40x40/42x42	6,2			53,16
315 PT 100 SKA	Swivel castor	100x24	60	121	58x58	40x40/42x42	6,2	85		64,08
316 PT 100 SKA	Swivel castor with total lock	100x24	60	121	58x58	40x40/42x42	6,2	96		68,28
670 PT 100 SKA	Fixed castor	100x24	60	121	58x58	40x40/42x42	6,2			62,16