


Institutional Series 315R, Wheel TP



max 60 kg -20 °C - +60 °C 50-75 mm

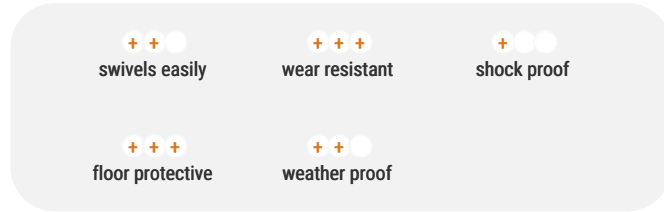

Material



Tread: Thermoplastic elastomer coating 95±3 Shore A**
High quality nylon wheel centre

Material Fork



Finish: zinc plated and chromate coated, large double ball bearing
– Ø 46 mm, revited,
dust protection ring, wheel axle bolted and locked, wheel-/ total
lock – spring stainless steel

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high resistance to shocks
- ✓ non-marking
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Portable bar units
- Metal-Technology
- House keeping carts
- Workshops
- Book carts
- Sidetables
- Laboratory equipment
- Instrument stands
- School furniture
- Bedside carts
- Hanging racks
- Carpentry
- Health-Professionals



SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
315 RÜ10 50 TPK	Swivel castor	50x18	40	70	10,5	51		17,40
316 RÜ10 50 TPK	Swivel castor with total lock	50x18	40	70	10,5	73		19,32
315 RÜ12 50 TPK	Swivel castor	50x18	40	70	12,5	51		17,40
316 RÜ12 50 TPK	Swivel castor with total lock	50x18	40	70	12,5	73		19,32
315 RÜ10 50 V	Swivel castor	50x18	40	70	10,5	51		19,68
316 RÜ10 50 V	Swivel castor with total lock	50x18	40	70	10,5	73		23,52
315 RÜ12 50 V	Swivel castor	50x18	40	70	12,5	51		19,68
316 RÜ12 50 V	Swivel castor with total lock	50x18	40	70	12,5	73		23,52
315 RÜ10 75 DEK	Swivel castor	75x25	60	97	10,5	68		27,00
316 RÜ10 75 DEK	Swivel castor with total lock	75x25	60	97	10,5	83		31,44
315 RÜ12 75 DEK	Swivel castor	75x25	60	97	12,5	68		27,00
316 RÜ12 75 DEK	Swivel castor with total lock	75x25	60	97	12,5	83		31,44
315 RÜ10 75 TPK	Swivel castor	75x25	60	97	10,5	68		56,16
316 RÜ10 75 TPK	Swivel castor with total lock	75x25	60	97	10,5	83		64,80
315 RÜ12 75 TPK	Swivel castor	75x25	60	97	12,5	68		56,16
316 RÜ12 75 TPK	Swivel castor with total lock	75x25	60	97	12,5	83		61,20