

Institutional Series 315R, Wheel SKA



max 60 kg -20 °C - +60 °C 76-100 mm

swivels easily

wear resistant

shock proof

floor protective

weather proof

Material



Skate wheel with polyurethane tyre, transparent
High quality nylon wheel centre

Material Fork




Finish: zinc plated and chromate coated, large double ball bearing
– Ø 46 mm, revited,
dust protection ring, wheel axle bolted and locked, wheel-/ total
lock – spring stainless steel

Advantages

- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ non-marking
- ✓ attractive appearance
- ✓ good chemical resistance

Applications

- Portable bar units
- Metal-Technology
- Workshops
- Book carts
- Sidetables
- Laboratory equipment
- Instrument stands
- School furniture
- Bedside carts
- Carpentry

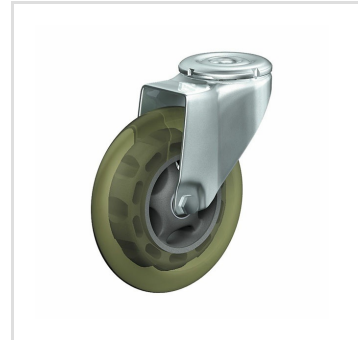

SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
315 RÜ10 75 SKA	Swivel castor	76x24	45	97	10,5	68		53,76
316 RÜ10 75 SKA	Swivel castor with total lock	76x24	45	97	10,5	96		58,80
315 RÜ12 75 SKA	Swivel castor	76x24	45	97	12,5	68		53,76
316 RÜ12 75 SKA	Swivel castor with total lock	76x24	45	97	12,5	96		58,80
315 RÜ10 100 SKA	Swivel castor	100x24	60	121	10,5	85		62,40
316 RÜ10 100 SKA	Swivel castor with total lock	100x24	60	121	10,5	96		64,44
315 RÜ12 100 SKA	Swivel castor	100x24	60	121	12,5	85		62,40
316 RÜ12 100 SKA	Swivel castor with total lock	100x24	60	121	12,5	96		64,44