


Institutional Series 315R, Wheel P



max 80 kg -30 °C - +70 °C 50-100 mm

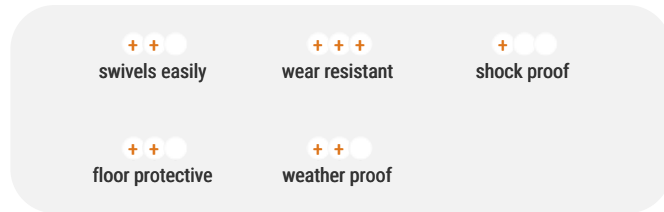

Material



Casted high quality nylon wheel

Material Fork



Finish: zinc plated and chromate coated, large double ball bearing – Ø 46 mm, revited, dust protection ring, wheel axle bolted and locked, wheel-/ total lock – spring stainless steel

Advantages

- ✓ easy running on smooth floors
- ✓ impact proof
- ✓ high abrasion resistance
- ✓ easy to clean
- ✓ high chemical resistance

Applications

- Metal-Technology
- Workshops
- Book carts
- Sidetables
- Carpentry



SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
315 RÜ10 50 P	Swivel castor	50x18	50	70	10,5	51	==	9,96
316 RÜ10 50 P	Swivel castor with total lock	50x18	50	70	10,5	73	==	14,16
315 RÜ12 50 P	Swivel castor	50x18	50	70	12,5	51	==	9,96
316 RÜ12 50 P	Swivel castor with total lock	50x18	50	70	12,5	73	==	14,16
315 RÜ10 75 P	Swivel castor	75x25	70	97	10,5	68	==	14,88
316 RÜ10 75 P	Swivel castor with total lock	75x25	70	97	10,5	83	==	17,40
315 RÜ12 75 P	Swivel castor	75x25	70	97	12,5	68	==	14,88
316 RÜ12 75 P	Swivel castor with total lock	75x25	70	97	12,5	83	==	17,40
315 RÜ10 100 P	Swivel castor	100x24	80	121	10,5	85	==	16,80
316 RÜ10 100 P	Swivel castor with total lock	100x24	80	121	10,5	96	==	21,48
315 RÜ12 100 P	Swivel castor	100x24	80	121	12,5	85	==	16,80
316 RÜ12 100 P	Swivel castor with total lock	100x24	80	121	12,5	96	==	21,48