


Institutional Series 318R, Wheel RBB



max 70 kg -30 °C - +70 °C 50-100 mm

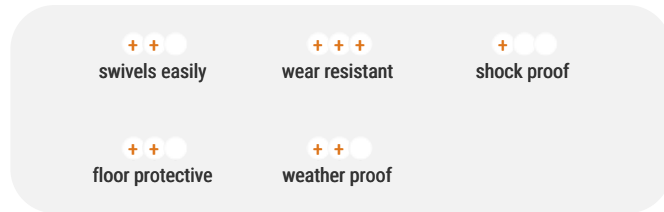

Material



Tread: Thermoplastic elastomer coating 85±3 Shore A
High quality nylon wheel centre

Material Fork



Finish: zinc plated and chromate coated, large double ball bearing
- Ø 46 mm, revited, dust protection ring, wheel axle bolted and
locked, wheel-/total lock - spring stainless steel black powder-
coated

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high resistance to shocks
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Metal-Technology
- Workshops
- Carpentry



SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
318 RÜ10 50 RBB	Swivel castor	50x19	40	70	11	51	==	22,80
319 RÜ10 50 RBB	Swivel castor with total lock	50x19	40	70	11	72	==	29,76
318 RÜ10 75 RBB	Swivel castor	75x23	60	100	11	68	==	24,96
319 RÜ10 75 RBB	Swivel castor with total lock	75x23	60	100	11	83	==	34,80
318 RÜ10 100 RBB	Swivel castor	100x25	70	122	11	86	==	36,72
319 RÜ10 100 RBB	Swivel castor with total lock	100x25	70	122	11	95	==	47,52