


Institutional Series 320BP, Wheel RBB



max -20 °C - +60 °C 50-75 mm

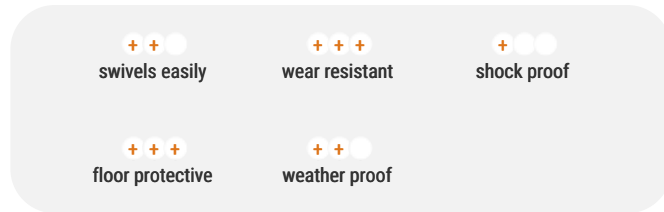

Material



Tread: Thermoplastic elastomer coating 85±3 Shore A, black, nonoiling, abrasion-resistant
High quality nylon wheel centre

Material Fork



black powder-coated, sheet steel, galvanized, large double ball bearing, riveted, wheel axle bolted and secured, total lock

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high resistance to shocks
- ✓ non-marking
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Portable bar units
- Metal-Technology
- Kitchen equipment
- Workshops
- Book carts
- Laboratory equipment
- Room service carts
- Instrument stands
- Diagnostic equipment
- School furniture
- Automobile test equipment
- Carpentry



SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
320B PT 50 RBB	Swivel castor	50x19+19	80	73	60x60	38x38/46x46	6	53	==	24,00
321B PT 50 RBB	Swivel castor with total lock	50x19+19	80	73	60x60	38x38/46x46	6	86	==	27,60
320B PT 75 RBB	Swivel castor	75x23+23	100	101	60x60	38x38/46x46	6	80	==	33,48
321B PT 75 RBB	Swivel castor with total lock	75x23+23	100	101	60x60	38x38/46x46	6	97	==	37,08