

# Institutional Series 320P, Wheel SKA



max 90 kg -20 °C - +60 °C 76-76 mm

+++  
swivels easily

+++  
wear resistant

+++  
shock proof

+++  
floor protective

+++  
weather proof

## Material



Skate wheel with polyurethane tyre, transparent  
High quality nylon wheel centre

## Material Fork



Finish: zinc plated and chromate coated, large double ball  
bearing, revited, wheel axle bolted and locked, wheel-/total lock –  
spring stainless steel

## Advantages


- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ non-marking
- ✓ attractive appearance
- ✓ good chemical resistance

## Applications

- Portable bar units
- Metal-Technology
- Workshops
- Book carts
- Laboratory equipment
- Room service carts
- Instrument stands
- School furniture
- Carpentry



SWIVEL CASTOR

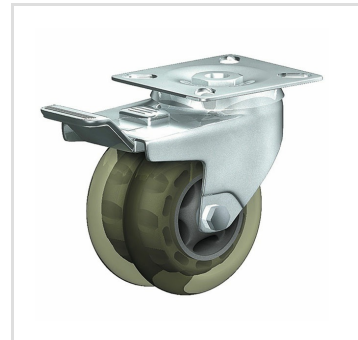

SWIVEL CASTOR WITH WHEEL BRAKE

## Dimensions

| ARTICLE<br>NUMBER | ARTICEL TYPE                     | WHEEL-Ø A X<br>WIDTH B MM | LOAD<br>CAPACITY KG | OVERALL HEIGHT<br>H MM | DIMENSION OF TOP<br>PLATE TP MM | HOLE SPACING<br>HS MM | HOLE-Ø HD<br>MM | SWIVEL RADIUS<br>SR MM | WHEEL<br>BEARING                                                                    | PRICE € |
|-------------------|----------------------------------|---------------------------|---------------------|------------------------|---------------------------------|-----------------------|-----------------|------------------------|-------------------------------------------------------------------------------------|---------|
| 320 PT 75<br>SKA  | Swivel castor                    | 76x24+24                  | 90                  | 103                    | 77x67                           | 61,5x51,5             | 8,5             | 69                     |  | 103,92  |
| 321 PT 75<br>SKA  | Swivel castor with<br>total lock | 76x24+24                  | 90                  | 103                    | 77x67                           | 61,5x51,5             | 8,5             | 106                    |  | 122,28  |