


Institutional Series 320R, Wheel TP



max 90 kg -20 °C - +60 °C 50-75 mm

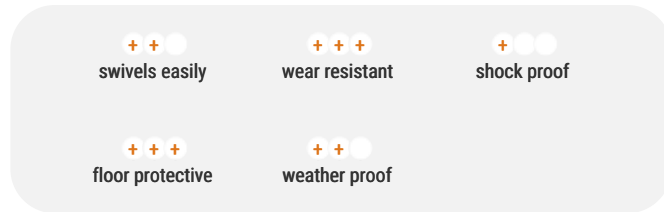

Material



Tread: Thermoplastic elastomer coating 95±3 Shore A**
High quality nylon wheel centre

Material Fork



Finish: zinc plated and chromate coated, large double ball bearing, revited, wheel axle bolted and locked, wheel-/total lock – spring stainless steel

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high resistance to shocks
- ✓ non-marking
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Portable bar units
- Metal-Technology
- House keeping carts
- Workshops
- Book carts
- Laboratory equipment
- Room service carts
- Instrument stands
- School furniture
- Carpentry



SWIVEL CASTOR



SWIVEL CASTOR WITH WHEEL BRAKE

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
320 RÜ 50 TPK	Swivel castor	50x18+18	55	70	10,5	53		28,32
321 RÜ 50 TPK	Swivel castor with wheel brake	50x18+18	55	70	10,5	78		34,20
320 RÜ 50 V	Swivel castor	50x18+18	55	70	10,5	53		25,56
321 RÜ 50 V	Swivel castor with wheel brake	50x18+18	55	70	10,5	78		31,92
320 RÜ 75 DK	Swivel castor	75x25+25	90	100	10,5	69		49,08
321 RÜ 75 DK	Swivel castor with total lock	75x25+25	90	100	10,5	106		67,68
320 RÜ 75 TPK	Swivel castor	75x25+25	90	100	10,5	69		106,56
321 RÜ 75 TPK	Swivel castor with total lock	75x25+25	90	100	10,5	106		124,32