


Institutional Series 320R, Wheel G



max 90 kg -20 °C - +60 °C 50-75 mm

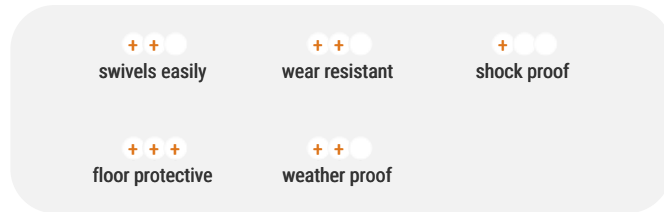

Material



Standard rubber tyre grey
Nylon rim

Material Fork



Finish: zinc plated and chromate coated, large double ball bearing, revited, wheel axle bolted and locked, wheel-/total lock – spring stainless steel

Advantages

- ✓ non-marking - floor protective
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

Applications

- Portable bar units
- Metal-Technology
- House keeping carts
- Workshops
- Book carts
- Laboratory equipment
- Room service carts
- Instrument stands
- School furniture
- Carpentry



SWIVEL CASTOR



SWIVEL CASTOR WITH WHEEL BRAKE

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
320 RÜ 50 G	Swivel castor	50x18+18	55	70	10,5	53	==	19,68
321 RÜ 50 G	Swivel castor with wheel brake	50x18+18	55	70	10,5	78	==	27,24
320 RÜ 50 GL	Swivel castor	50x18+18	55	70	10,5	53	==	16,32
321 RÜ 50 GL	Swivel castor with wheel brake	50x18+18	55	70	10,5	78	==	20,88
320 RÜ 75 GK	Swivel castor	75x25+25	90	100	10,5	69	⊗	34,20
321 RÜ 75 GK	Swivel castor with total lock	75x25+25	90	100	10,5	106	⊗	54,84
320 RÜ 75 GKL	Swivel castor	75x25+25	90	100	10,5	69	⊗	30,60
321 RÜ 75 GKL	Swivel castor with total lock	75x25+25	90	100	10,5	106	⊗	50,40
320 RÜ 75 G	Swivel castor	75x25+25	90	100	10,5	69	==	28,20
321 RÜ 75 G	Swivel castor with total lock	75x25+25	90	100	10,5	106	==	48,96