


Institutional Series 330LR, Wheel TP



max 100 kg -20 °C - +60 °C 125-125 mm

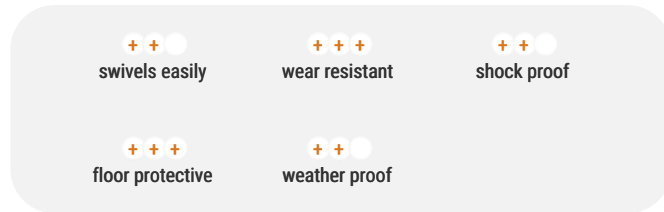

Material



Tread: Thermoplastic elastomer coating 95±3 Shore A**
High quality nylon wheel centre

Material Fork



Finish: zinc plated and chromate coated, large double ball bearing
– Ø 57 mm, revited, dust protection ring, wheel axle bolted and locked, total lock – spring stainless steel

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high resistance to shocks
- ✓ non-marking
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Metal-Technology
- Laundry trucks
- Kitchen equipment
- Mail carts
- Workshops
- Laboratory equipment
- Trolleys
- Room service carts
- Instrument stands
- School furniture
- Carpentry



SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
330L RÜ10 127 TPKX	Swivel castor	125x32	100	158	10,5	103		61,44
331L RÜ10 127 TPKX	Swivel castor with total lock	125x32	100	158	10,5	130		77,28
330L RÜ12 127 TPKX	Swivel castor	125x32	100	158	12,5	103		61,44
331L RÜ12 127 TPKX	Swivel castor with total lock	125x32	100	158	12,5	130		77,28