

Institutional Series 330LZ, Wheel TP



max 100 kg -20 °C - +60 °C 125-125 mm

swivels easily

wear resistant

shock proof

floor protective

weather proof

Material



Tread: Thermoplastic elastomer coating 95±3 Shore A**
High quality nylon wheel centre

Material Fork



Finish: zinc plated and chromate coated, large double ball bearing
– Ø 57 mm, stem revited, wheel axle bolted and locked, total-/
directional lock – spring stainless steel

Advantages


- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high resistance to shocks
- ✓ non-marking
- ✓ easy to clean
- ✓ good chemical resistance

Applications


- Metal-Technology
- Kitchen equipment
- Food & dish carts
- Food & dish carts
- Workshops
- Laboratory equipment
- Room service carts
- Instrument stands
- School furniture
- Carpentry
- Health-Professionals



SWIVEL CASTOR

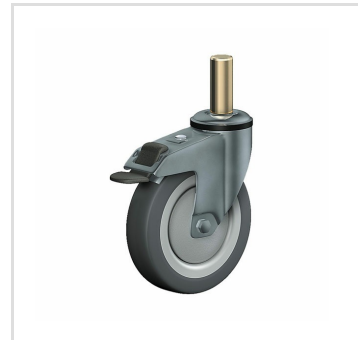

SWIVEL CASTOR WITH TOTAL LOCK

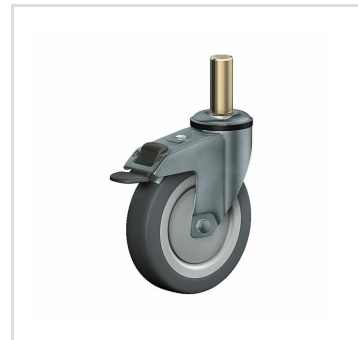

WITH DIRECTIONAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	STERN MM	TRANSVERSE BORE MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
330L Z18 127 TPKX	Swivel castor	125x32	100	161	18x62	M6 auf 19	103		73,68
331L Z18 127 TPKX	Swivel castor with total lock	125x32	100	161	18x62	M6 auf 19	130		89,64
330L Z18 127 TP	Swivel castor	125x32	100	161	18x62	M6 auf 19	103		74,88
331L Z18 127 TP	Swivel castor with total lock	125x32	100	161	18x62	M6 auf 19	130		96,00