


Rail wheels - Double-flanged Wheel Series SDF



 max 33600 kg  -30 °C - +350 °C*  75-600 mm

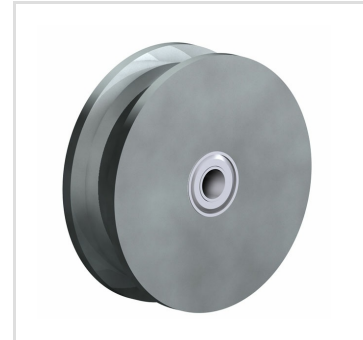

Material

Double-flanged wheel - cast steel BS 3100
tread properly machined

Advantages

- ✓ very high load capacity
- ✓ excellent abrasion resistance
- ✓ for high temperatures

Applications

- Building-Industry

Dimensions

ARTICLE NUMBER	WHEEL-Ø WITHOUT FLANGE MM	WHEEL-Ø WITH FLANGE MM	TREAD WIDTH MM	WHEEL WIDTH MM	LOAD CAPACITY KG	WHEEL BEARING	BORE DIAMETER MM	PRICE €
75 SDF-25	75	100	35	60	1400		25 H7	150,96
75 SDFK 30	75	100	35	60	1400		30	221,16
75 SDFTM 25	75	100	35	60	1400		25	auf Anfrage
100 SDF-25	100	125	35	60	1900		25 H7	145,44
100 SDFK 30	100	125	35	60	1900		30	211,56
100 SDFTM 30	100	125	35	60	1900		30	auf Anfrage
150 SDF-30	150	190	50	80	4200		30 H7	583,56
150 SDFK 40	150	190	50	80	4200		40	auf Anfrage
150 SDFTM 40	150	190	50	80	4200		40	434,16
200 SDF-40	200	240	50	90	5600		40 H7	572,64
200 SDFK 50	200	240	50	90	5600		50	642,60
200 SDFTM 50	200	240	50	90	5600		50	635,64
250 SDF-50	250	295	60	100	8300		50 H7	767,64
250 SDFK 60	250	295	60	100	7340		60	1040,40
250 SDFTM 50	250	295	60	100	8300		50	auf Anfrage
300 SDF-50	300	345	65	100	10900		50 H7	1634,04
300 SDFK 75	300	345	65	100	10900		75	auf Anfrage
300 SDFTM 50	300	345	65	100	10600		50	auf Anfrage
350 SDF-60	350	395	75	110	14700		60 H7	auf Anfrage
350 SDFTM 75	350	395	75	110	13350		75	auf Anfrage
450 SDF-75	450	495	80	125	20100		75 H7	auf Anfrage
450 SDFTM 75	450	495	80	125	20100		75	auf Anfrage
600 SDF-100	600	660	100	150	33600		100 H7	auf Anfrage
600 SDFTM 150	600	660	100	150	33600		150	auf Anfrage