



Rail wheels - V-grooved Wheel Series SFT

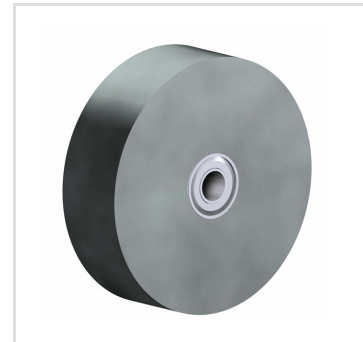

max 50400 kg -30 °C - +350 °C* 75-600 mm

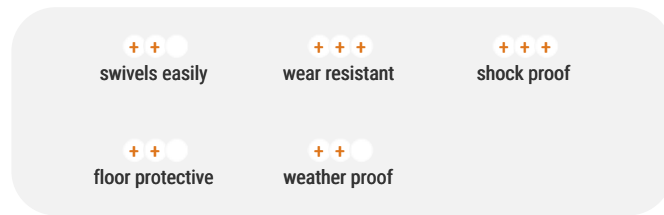

Material

_____ Rail wheel - steel BS 970
tread properly machined

Advantages

- ✓ very high load capacity
- ✓ excellent abrasion resistance
- ✓ for high temperatures

Applications

- Building-Industry

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	HUB WIDTH MM	WHEEL BEARING	BORE DIAMETER MM	PRICE €
75 SFT-25	Rail Wheel	75 x 60	2400	60		25 H7	auf Anfrage
75 SFTK 30	Rail Wheel	75 x 60	2040	60		30	191,40
75 SFTTM 25	Rail Wheel	75 x 60	2400	60		25	auf Anfrage
100 SFT-25	Rail Wheel	100 x 60	3600	60		25 H7	auf Anfrage
100 SFTK 30	Rail Wheel	100 x 60	2040	60		30	387,36
100 SFTTM 25	Rail Wheel	100 x 60	3600	60		25	auf Anfrage
150 SFT-30	Rail Wheel	150 x 80	6700	80		30 H7	468,84
150 SFTK 40	Rail Wheel	150 x 80	3384	80		40	auf Anfrage
150 SFTTM 40	Rail Wheel	150 x 80	6700	80		40	auf Anfrage
200 SFT-40	Rail Wheel	200 x 90	10000	90		40 H7	auf Anfrage
200 SFTK 50	Rail Wheel	200 x 90	7340	90		50	530,88
200 SFTTM 50	Rail Wheel	200 x 90	10000	90		50	auf Anfrage
250 SFT-50	Rail Wheel	250 x 100	13900	100		50 H7	716,88
250 SFTK 75	Rail Wheel	250 x 100	13900	100		75	936,00
250 SFTTM 75	Rail Wheel	250 x 100	13900	100		75	auf Anfrage
300 SFT-50	Rail Wheel	300 x 100	16800	100		50 H7	auf Anfrage
300 SFTK 75	Rail Wheel	300 x 100	14680	100		75	auf Anfrage
300 SFTTM 75	Rail Wheel	300 x 100	16800	100		75	auf Anfrage
350 SFT-50	Rail Wheel	350 x 110	21500	110		50 H7	auf Anfrage
350 SFTK 75	Rail Wheel	350 x 110	14680	110		75	auf Anfrage
350 SFTTM 75	Rail Wheel	350 x 110	20400	110		75	auf Anfrage
450 SFT-75	Rail Wheel	450 x 125	31500	125		75 H7	auf Anfrage
450 SFTTM 100	Rail Wheel	450 x 125	30580	125		100	auf Anfrage
600 SFT-100	Rail Wheel	600 x 150	50400	150		100 H7	auf Anfrage
600 SFTTM 150	Rail Wheel	600 x 150	50400	150		150	auf Anfrage