


Rail wheels - V-grooved Wheel Series SVT



 max 2200 kg  -30 °C - +350 °C*  75-200 mm

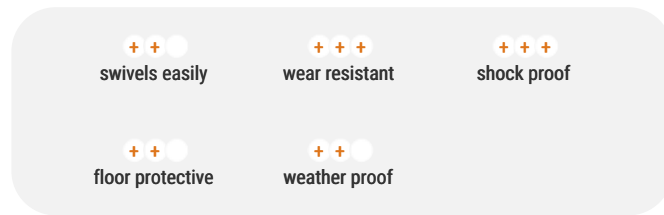

Material

90° V-grooved wheel - steel BS 3100

Advantages

- ✓ very high load capacity
- ✓ excellent abrasion resistance
- ✓ for high temperatures

Applications

- Building-Industry

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø WITHOUT FLANGE MM	WHEEL-Ø WITH FLANGE MM	WHEEL WIDTH MM	LOAD CAPACITY KG	HUB WIDTH MM	WHEEL BEARING	BORE DIAMETER MM	PRICE €
75 SVT-20	Rail Wheel	50	75	35	300	35		20 H7	126,12
75 SVTK 20	Rail Wheel	50	75	35	300	35		20	113,64
100 SVT-25	Rail Wheel	75	100	40	600	40		25 H7	auf Anfrage
100 SVTK 25	Rail Wheel	75	100	40	600	40		25	137,28
125 SVT-25	Rail Wheel	100	125	40	1200	40		25 H7	auf Anfrage
125 SVTK 30	Rail Wheel	100	125	40	1200	40		30	auf Anfrage
150 SVT-30	Rail Wheel	125	150	45	1400	45		30 H7	auf Anfrage
150 SVTK 35	Rail Wheel	125	150	45	1400	45		35	362,64
200 SVT-30	Rail Wheel	168	200	50	2200	50		30 H7	597,60
200 SVTK 40	Rail Wheel	168	200	50	2200	50		40	333,36