


Spring-loaded Castors Series LR, Wheel TP



max 50 kg -20 °C - +60 °C 50-50 mm

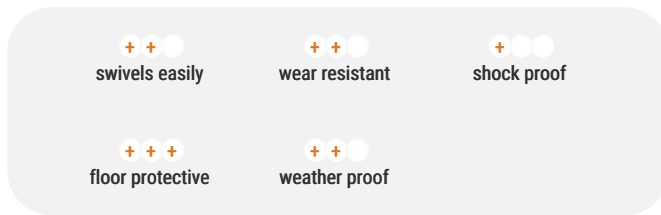

SWIVEL CASTOR

Material



Tread: Thermoplastic elastomer coating 95±3 Shore A**
High quality nylon wheel centre

Material Fork



Finish: zinc plated and chromate coated, large double ball bearing
- Ø 46 mm, revited, dust protection ring, wheel axle bolted and
locked, wheel-/total lock - spring stainless steel

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high resistance to shocks
- ✓ non-marking
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Decoration carts
- Metal-Technology
- Stage equipment
- Carpentry
- Building-Industry

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
LR315 50 TPK	Swivel castor	50x18	50	150	59,5x48	38x22,5	5,3	53		70,32
LR670 50 TPK	Fixed castor	50x18	50	150	59,5x48	38x22,5	5,3			40,20
LR315 50 TP	Swivel castor	50x18	50	150	59,5x48	38x22,5	5,3	53		auf Anfrage
LR670 50 TP	Fixed castor	50x18	50	150	59,5x48	38x22,5	5,3			auf Anfrage