

Spring-loaded Castors Series LRCR, Wheel EK

 max 75 kg  -20 °C - +60 °C  100-100 mm

 **swivels easily**

 **wear resistant**

 **shock proof**

 **floor protective**

 **weather proof**

Material

Tread: Elastic solid rubber tyre, black, 73±5 Shore A, vulcanised on wheel centre
Wheel centre: Die-cast aluminium alloy

Material Fork

fabricated steel housing with black finish steel body with elastic solid rubber tyre,
75 ± 5 Shore Avulcanised, black or grey

Advantages

-  excellent running performance
-  very silent in motion
-  low rolling resistance
-  good abrasion resistance
-  corrosion resistant
-  non-marking in grey


Applications

- Decoration carts
- Stage equipment





SWIVEL CASTOR

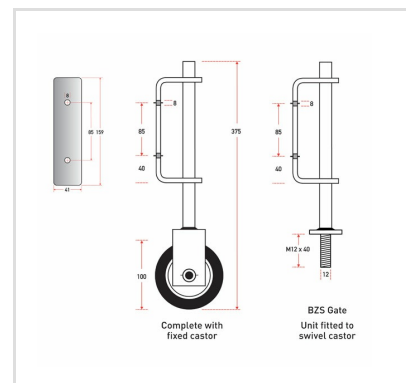

FABRICATED STEEL HOUSING WITH BLACK FINISH STEEL BODY WITH ELASTIC SOLID RUBBER TYRE, 75 ± 5 SHORE AVULCANISED, BLACK OR GREY

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
LRCR 100 EK	Swivel castor	100x40	75	375	159x41	85	8	34		192,36
LRCRF 100 EK	Fixed castor	100x40	75	375	159x41	85	8			153,84