

Stage Castors Series 69, Wheel BA

 max 800 kg  -30 °C - +80 °C  50-200 mm

+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

+++
weather proof

Material



Vulkollan® Crowned wheel tread

Rim - aluminium

Material Fork



large swivel bearing, dust protection ring, with strong kingpin bolted and locked

Advantages

- ✓ ergonomic running with crowned Vulkollan® tread
- ✓ very silent in motion
- ✓ very low rolling resistance
- ✓ easy in revving
- ✓ high abrasion and tear resistance
- ✓ good chemical resistance


Applications

- Decoration carts
- Stage equipment

 ROLLENBAU



SWIVEL CASTOR

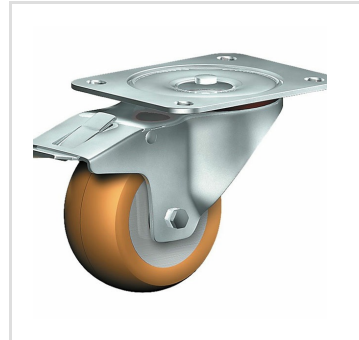

SWIVEL CASTOR WITH TOTAL LOCK



90° DIRECTIONAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
69A/50-42/1	Swivel castor	50 x 42	100	80	95x70	75x50	9	61		126,60
69SP/65-30 BA	Swivel castor	65 x 30	130	100	100x85	80x60	9	78		158,40
69A/80-40 BA	Swivel castor	80 x 40	250	112	135x105	105x80	11	90		164,16
69A/100-40 BA	Swivel castor	100 x 40	280	129	135x110	105x80	11	100		132,24
69B/100-40 BA	Fixed castor	100 x 40	280	129	135x110	105x80	11			120,96
69S/100-40 BA	Swivel castor	100 x 40	350	135	100x85	80x60	9	95		206,04
69F/100-40 BA	Swivel castor with total lock	100 x 40	280	125	135x110	105x80	11	140		227,28
69R/100-40 BA	Swivel castor with directional lock	100 x 40	280	125	135x110	105x80	11	140		225,72
69S/125-45 BA	Swivel castor	125 x 45	500	180	135x110	105x80	13	117		310,44
PS125-150 BA	Swivel castor	150 x 50	700	185	135x105	105x80	13	120		333,36
69S/150-50 BA	Swivel castor	150 x 50	700	190	135x105	105x80	13	126		362,40
69R/150-50 BA	Swivel castor with directional lock	150 x 50	700	190	135x105	105x80	13	155		527,52
69S/200-50 BA	Swivel castor	200 x 50	800	251	135x105	105x80	13	170		442,32